




Offering a Complete Line of Instrumentation & Controls
for the Commercial, Institutional & Industrial Marketplace

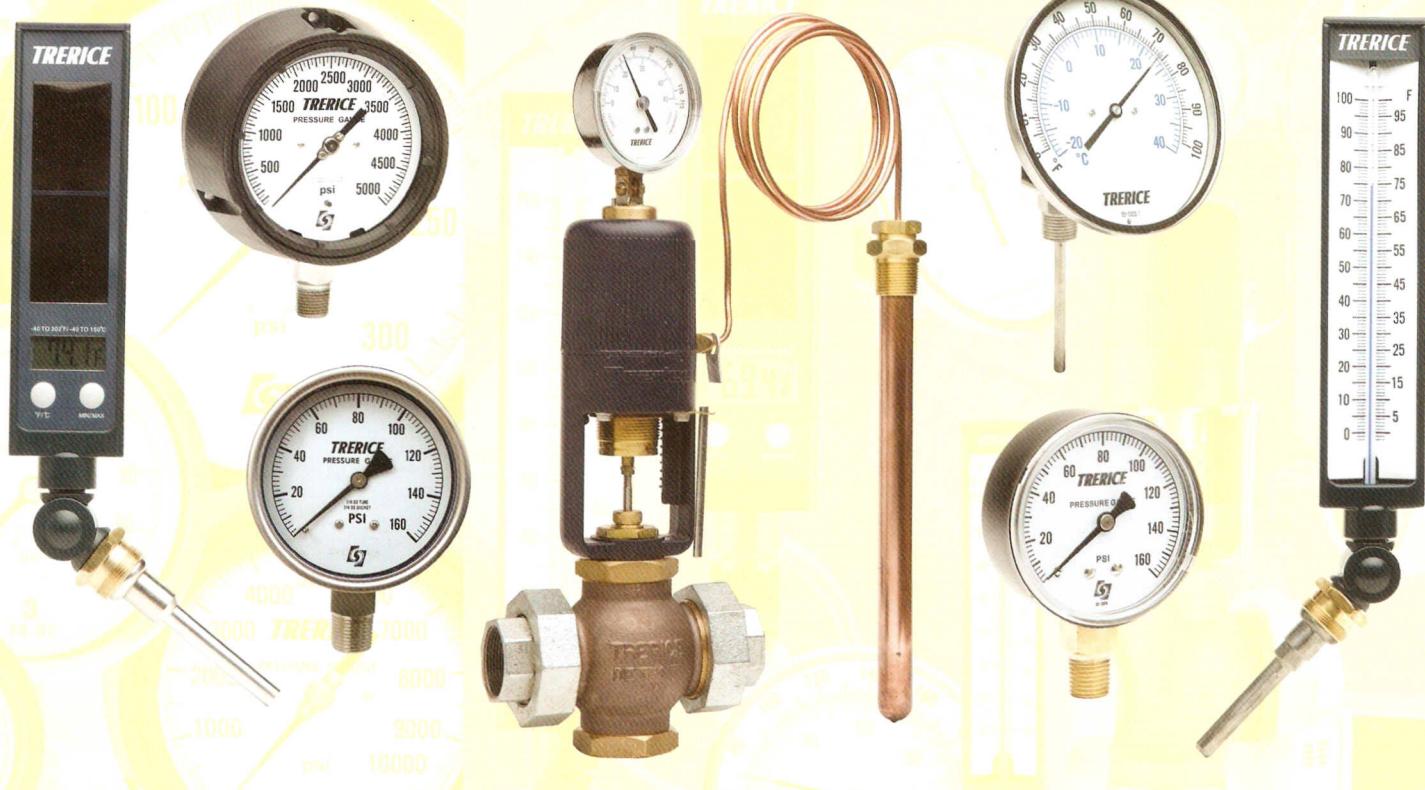

Manufacturer of

Pressure Gauges

Temperature Instrumentation

Regulators & Control Valves

Since 1923 the H.O. Trerice Company has consistently produced the most "Complete Line" of instrumentation and controls available to industry. Trerice maintains an international reputation for excellence in design, engineering and product quality. With pride, we present the following brief introduction to our "Complete Line" of Trerice products.

Tel: 1.888.TRERICE

Website: www.TRERICE.com



Solar Therm Light Powered Digital Thermometer

The Trerice "Solar-Therm" replaces dangerous out-of-date Mercury thermometers in environmentally conscious applications. It features a rugged cast aluminum case, large easy to read LCD display and an adjustable angle stem that is fully interchangeable with existing industrial liquid-in-glass thermometers. The "Solar Therm" requires no external power and needs only 10 lux of illumination to operate. The unique Min/Max feature provides instant recall of minimum and maximum temperatures over a given period and is easily reset.



Bimetal Thermometers

Trerice Bimetal Thermometers are available in a wide variety of configurations including adjustable angle, back or bottom connections. Dial sizes are 5", 3", 2", 1 3/4" and 1". All models are of welded stainless steel construction and are hermetically sealed. The 5" diameter adjustable angle type provides excellent readability and adjustability. The 3" rigid back model offers high quality at an economical price. For corrosive or pressure applications, use of a thermowell is required to prevent damage to the thermometer and facilitate its removal from the process.

Pressure Gauges

Trerice offers the right pressure gauge for any application. Please see an introduction to our most common lines below. To enhance our gauges, Trerice offers a complete line of gauge accessories including: pressure snubbers, coil syphons, needle valves and gauge cocks.



Trerice Process Gauges are designed for use in petrochemical, pharmaceutical and other process industries. All process gauges feature solid front, blow-out back type cases in either polypropylene (450 Series) or stainless steel (750 Series). In addition, all Trerice Process Gauges are field liquid-fillable.



Trerice Industrial Pressure Gauges are available in a broad range of case materials, sizes, wetted materials and connections to meet your every need. These gauges provide the accuracy and durability required in industrial applications. Trerice 700 and D80 Series Gauges feature stainless steel case construction and are hermetically sealed for field liquid filling. Trerice 500X Series Gauges have rugged cast aluminum cases in dial sizes up to 12" and feature 1/2% full-scale accuracy.

Trerice Commercial Pressure Gauges are the most specified HVAC/R gauges in the construction industry. Trerice Commercial Pressure Gauges are accurate to 1% full-scale and come with either a rugged cast aluminum (600C Series) or corrosion resistant stainless steel case (620B Series).

Trerice Utility Gauges are designed for repeatable performance at an economical cost. The 800B is useful for any situation requiring general pressure indication and is available in dial sizes from 1.5" - 4" in bottom and back connections.




Industrial Thermometers

Trerice Adjustable Angle Series, cast aluminum case, liquid-in-glass industrial thermometers have long been recognized as the industry standard and feature a mercury free spirit fill. Standard case length is 9" (BX); 7" (AX) and 12" (CX) case lengths are also available. Stem lengths are 3 1/2", 6" and 8". Thermowells can be supplied in brass or stainless steel and are required to protect the thermometer stem and allow for its removal from the process.



Dial Thermometers

Trerice Dial Thermometers are available in either adjustable angle direct mount or remote connected designs with bronze or stainless steel sensing bulbs and capillary tubing. Actuation mediums are vapor or solid liquid and cover a wide variety of temperature ranges between -40° F to 450° F. Cases are 3 1/2" stainless steel or 4 1/2" through 8 1/2" cast aluminum.

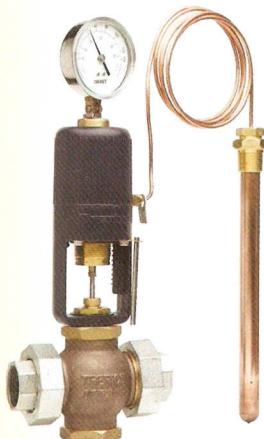

Temperature Regulators


Trerice 91000 Series Self-operating Temperature Regulators are the #1 choice of original equipment manufacturers (OEMs), mechanical contractors and specifying engineers. These regulators are the ideal choice for temperature control of tanks, process streams and industrial equipment.

The self-operating design provides reliable performance under the most extreme conditions without the need for an external power source. These regulators are available with 2-way or 3-way valves in sizes ranging from 1/8" reduced port to 6". Capillary systems and thermowells are available in a variety of materials to withstand the harshest conditions.



Air Operated Control Valves

Trerice Air Operated Diaphragm Control Valves are actuated by a 1-17 PSIG air signal from a Trerice model TA901 I/P transducer used in conjunction with a Trerice TR890 Series electronic PID controller. The 910 Series comes standard with many features usually found on more expensive units. The 940 Series is well suited to severe service conditions where its heavy-duty construction and high performance capabilities make it the choice of specifying engineers in industrial applications. Trerice air-operated control valves are available in sizes from 1/8" reduced port through 8" in 2-way and 3-way designs in multiple body materials. A wide variety of valve plug styles are available, as well as both pneumatic and electro-pneumatic positioners and a full compliment of accessories.

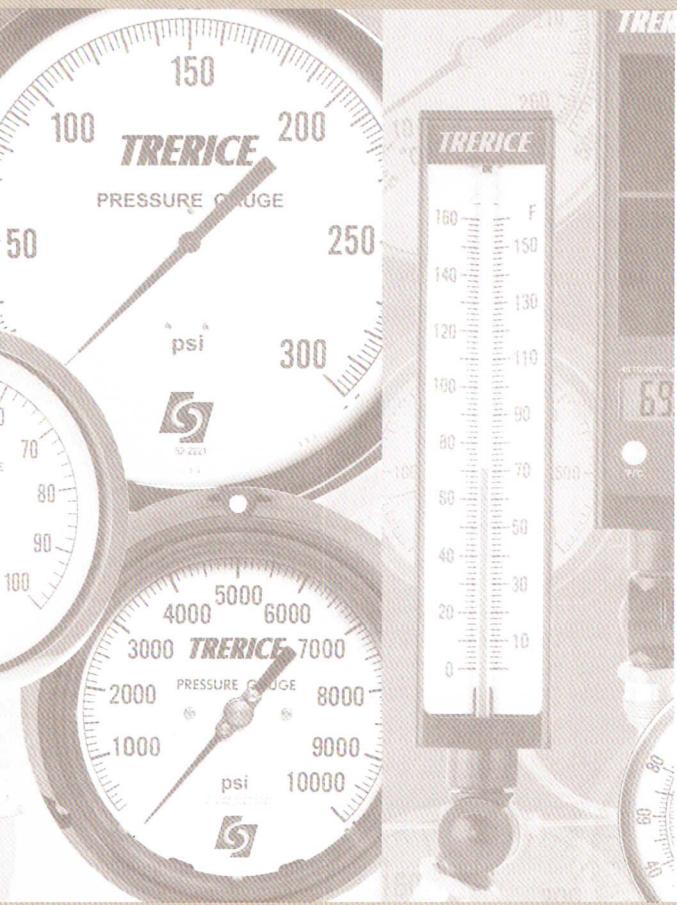

"Plus" Products

Trerice "Plus" products provide both local and remote indication in one unit. Their dual sensor design eliminates the need for additional instrumentation or connections. The separate mechanical and electronic sensors insure integrity of the temperature or pressure readings.

700-Plus pressure gauges integrate an independent transmitter in a mechanical pressure gauge. **BX** and **Bimetal Plus** thermometers include an internally mounted sensor for remote readings. The Bimetal Plus offers a Thermocouple or RTD while the BX Plus is supplied with an RTD.

The Trerice **TRD16 Digital Indicator** and **TRS16 Selector Switch** are the ideal companions for remote temperature sensing operations. The TRD16 has a large 20mm LED Display for either Thermocouple or RTD inputs. The TRS16 allows for economical measurement of multiple processes (using the same thermocouple type) while requiring only one digital indicator. Their unique design allows for both units to be mounted together in a 1/4 Din opening.

H.O. Trerice Company

From its start in 1923 in Detroit, the H.O. Trerice Company has remained true to the commitment of its founder - **QUALITY** in both **PRODUCT** and **SERVICE**. This commitment has solidly established Trerice as a worldwide leader in the manufacture of specialized engineered products for industrial temperature and pressure measurement and control.

When your requirements demand quality instrumentation and controls, the broad line of Trerice products are ready for your application. Contact us today for detailed information on your particular areas of interest.

REGIONAL SALES OFFICES:

- Northeast
Philadelphia, PA
- Central East
Buffalo, NY
- Midwest
Chicago, Ill.
- Southeast
Atlanta, GA
- West
Seattle, WA
- Canada
Toronto, ON

12950 W. Eight Mile Road • Oak Park • MI 48237-3288

Tel: 1.888.TRERICE • Fax: 1.248.399.7246

Website: www.TRERICE.com

E-mail: info@TRERICE.com