

ARMSTRONG

DESIGN ENVELOPE

DESIGN ENVELOPE
IVS SERIES

WARNING
Always read the manual before use.
Failure to do so may result in injury or
equipment damage. See the manual for
complete safety instructions.

Intelligent Variable Speed pumps

DESIGN ENVELOPE


OPTIMUM
PERFORMANCE
ANY GIVEN TIME

A


Armstrong's Design Envelope IVS pumps are a complete solution for heating and cooling systems. The integration of a perfectly matched Vertical In-Line pump, motor, and Intelligent Variable Speed controller creates an innovative, high-value pumping solution.

Rising energy costs and sustainability governance are driving the development of new technologies to improve the performance of buildings. Armstrong answers the challenge with unparalleled pumping efficiency and performance.



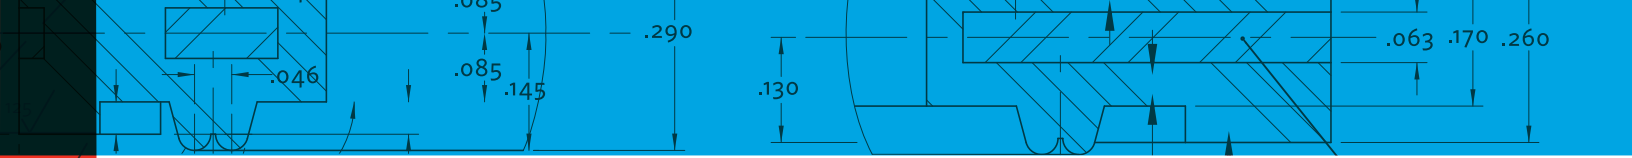

The Design Envelope IVS control is available for Armstrong's Series 4300 and 4380 Vertical In-Line pumps as well as Series 4302 and 4382 dualARM pumps. These solutions are available with integrated controller or in a stand-alone configuration (controller mounted separately).

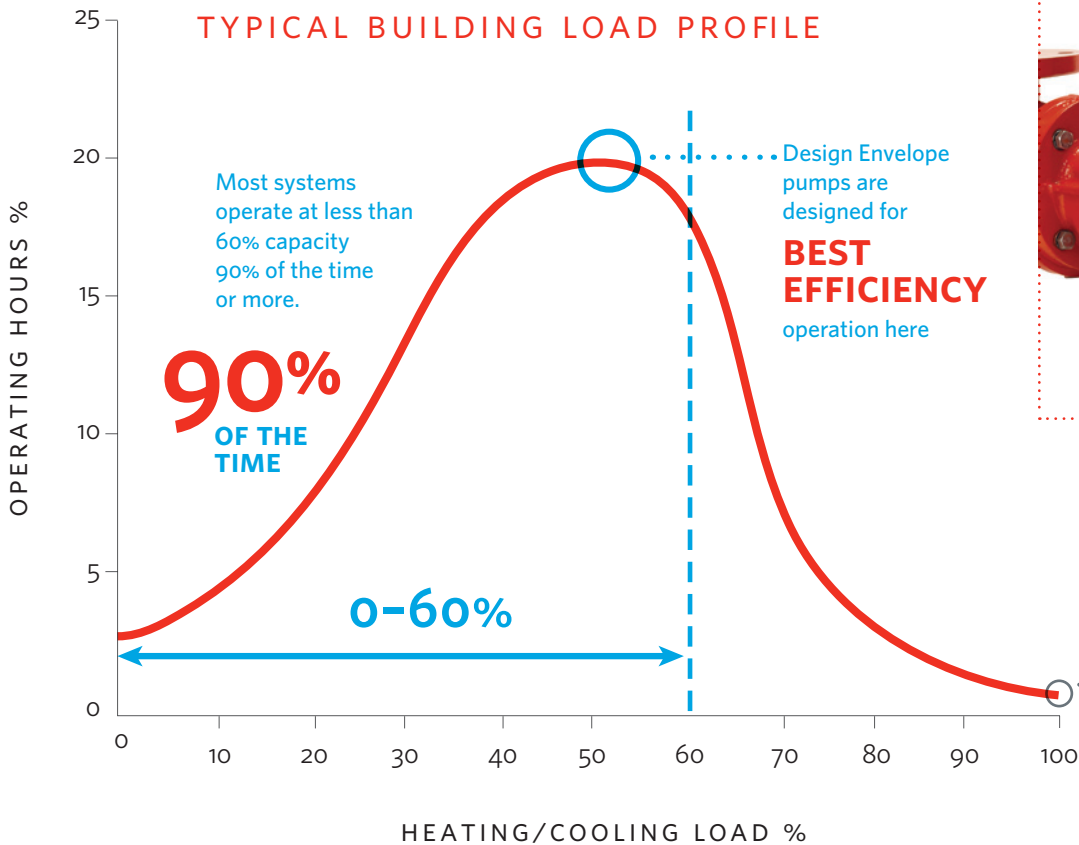

Design Envelope IVS pumps reduce pumping costs through variable speed, demand-based operation — consuming only the energy required, based on current system demand.

Design Envelope IVS pumps use a combination of optimized impeller size and speed control for energy efficient operation within a given perfor-


mance envelope. The performance envelopes are mapped for the best pump efficiency at 50% of the design flow rate, where variable flow systems operate most often. This ensures a building's hydronic pumping system consumes as little energy as possible. It also ensures that the installation meets ASHRAE 90.1 guidelines requiring 70% energy savings at 50% of peak load.

SAVINGS


ENERGY SAVINGS

Armstrong Design Envelope variable speed technology fundamentally changes the operation of a pump within the larger HVAC system. The variable speed intelligence embedded in the Armstrong Design Envelope ivs controller adjusts the speed of the pump to meet the immediate load on the HVAC system. This results in the pump responding instantaneously to the system load and drawing only the power required to meet that load.

UP TO
70%
ENERGY
SAVINGS




AT 100% DESIGN FLOW

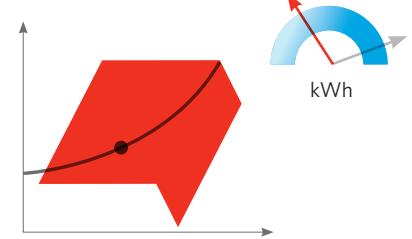

AT 50% DESIGN FLOW

The reduction in power draw and the resulting savings in energy costs can be dramatic.

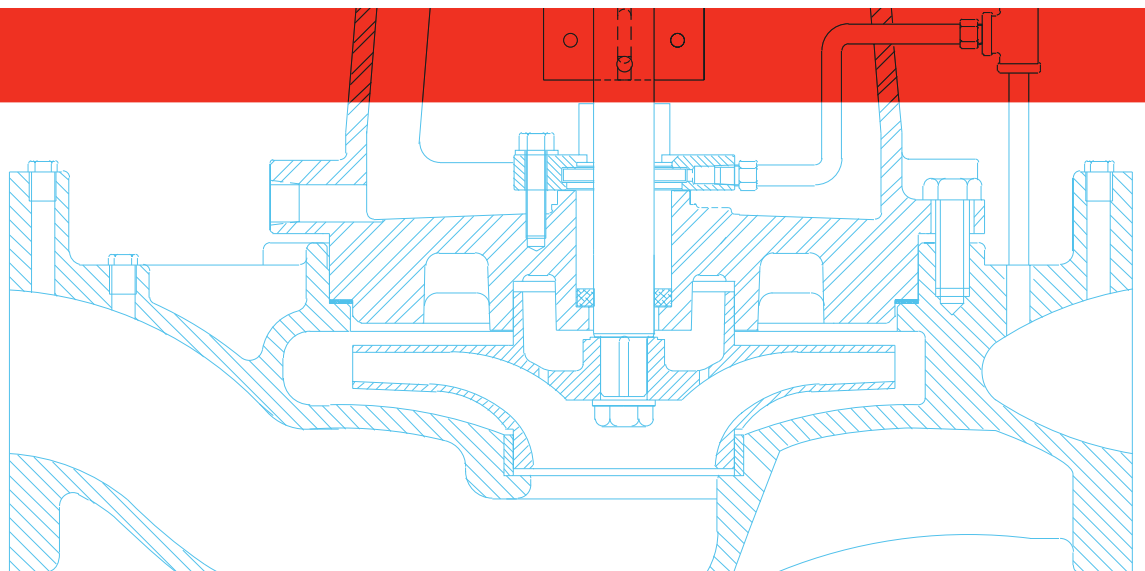

EVERYWHERE

INSTALLATION COST SAVINGS


View your savings and ROI using real data from your installation.

Ask your Armstrong representative.

VERTICAL IN-LINE


END SUCTION

Suction Guides and Flo-Trex valves cut your costs by reducing the requirement for pipe and fittings.



4300 IVS (3×3×10 7.5hp)

VS.

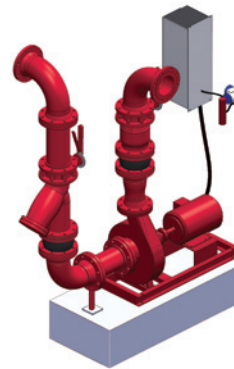

4030 (3×2×10 7.5hp)

Design Envelope Sensorless split-coupled vIL IVS installation with Suction Guide and Flo-Trex valve.

End suction base mounted installation with traditional piping.

IDENTICAL APPLICATION

1.00

INSTALLATION COST*

2.18

* Costs are normalized so no units are shown. For further detail, see Armstrong Value Proposition sheet (doc. #43.135).

Everything included

- Elegant space-saving design
- All-in-one pump and vFD solution
- Perfectly matched pump-motor-control combination
- No mounting of vFD to wall
- No re-alignment of shaft and coupling
- No flexible piping connectors
- No inertia base or grouting

Contents required


- Flex connectors
- Inertia base
- Remote sensor

Labour requirements

- Grouting
- Shaft realignment
- Wiring to vFD
- Mounting and wiring of remote sensor

HOW IT

THE SENSOR WITHIN

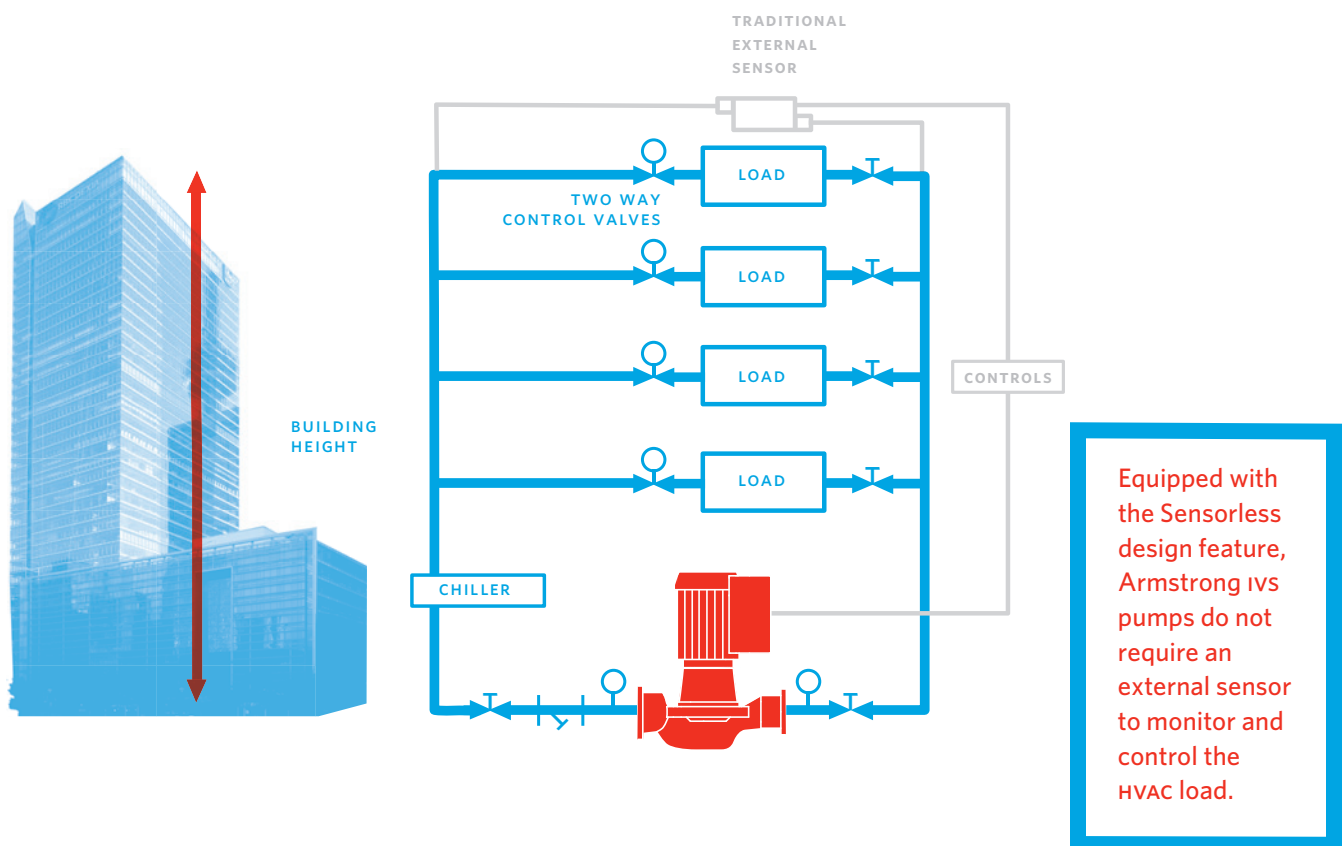


In a chilled water system, a building's temperature controls are connected to control valves that manage the flow rate to the cooling coils (load). As the control valves open for more cooling, the differential pressure across the valve decreases. The ivs controller

reacts to this change by increasing the pump speed to maintain the pressure setpoint. If the control valves close to reduce the cooling output, the differential pressure across the valve increases, and the ivs controller reduces the pump speed to maintain the pressure setpoint.

WORKS

MONITOR POWER & SPEED

CONTROL HEAD & FLOW

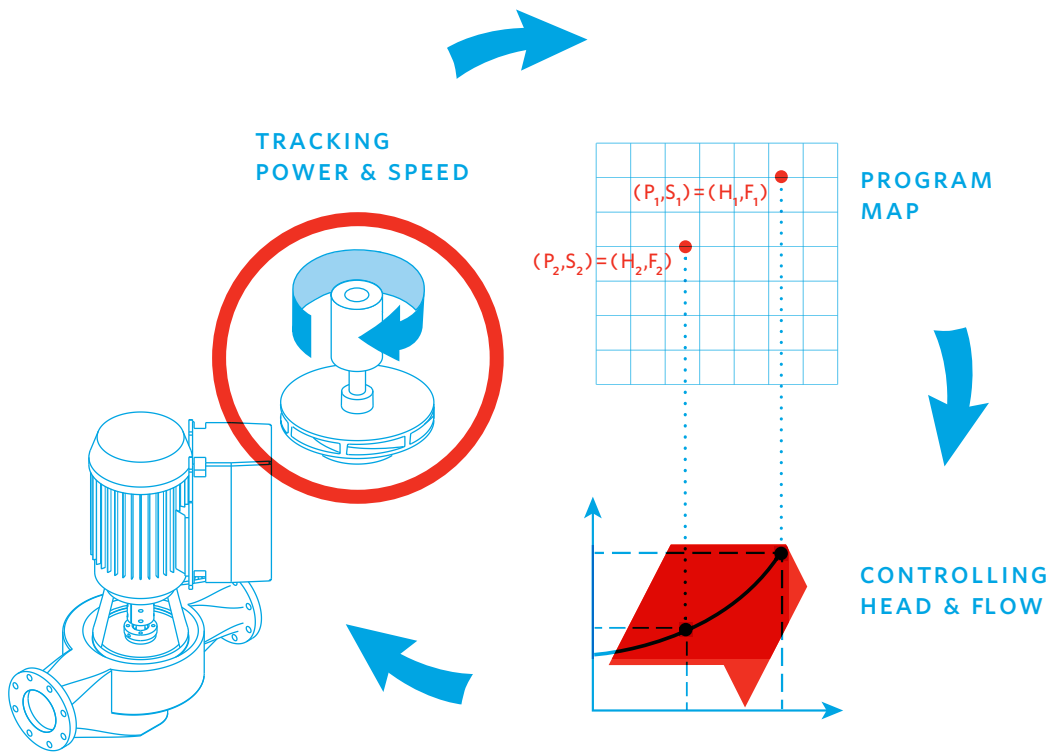

Equipped with the ivs Sensorless feature, a pump's performance characteristic curve (power draw and RPM) and operating curve are pre-programmed into the controller. During operation, the controller monitors the power and speed of the pump and establishes the hydraulic performance and position

of the pump's head-flow condition relative to the system requirements. As the building's control valves open or close to regulate flow to the cooling coils and maintain building occupant comfort, the ivs Sensorless controller automatically adjusts the pump speed to match the required system pressure requirement at the current flow.

FUTURE



DESIGN FLEXIBILITY

Changes to building conditions

With Armstrong Design Envelope variable speed technology the increased range of operating performance also reduces the risk of underperformance in the HVAC system. As occupant load or building surroundings change, the building load will change as well. A Design Envelope pump will still operate at high efficiency levels and will provide the exact pumping performance that supports the HVAC system and keeps costs at a minimum.

Armstrong Design Envelope provides building owners with the necessary adaptability to changes that can occur during a building's operating life. Typically, a building's load can shift because:


Changes to building occupancy

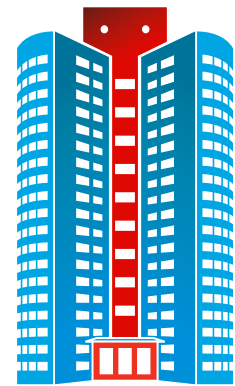



Changes to the building design



LOW-EMISSION GLASS


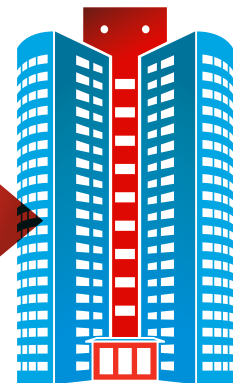


Changes to shade conditions caused by modifications to the building's surroundings

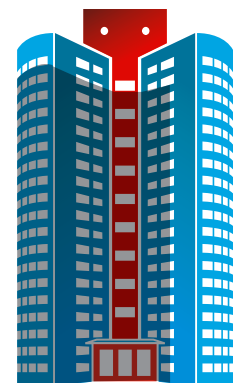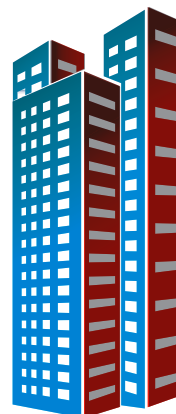

PROOF

EFFICIENCY-BASED PERFORMANCE SELECTION

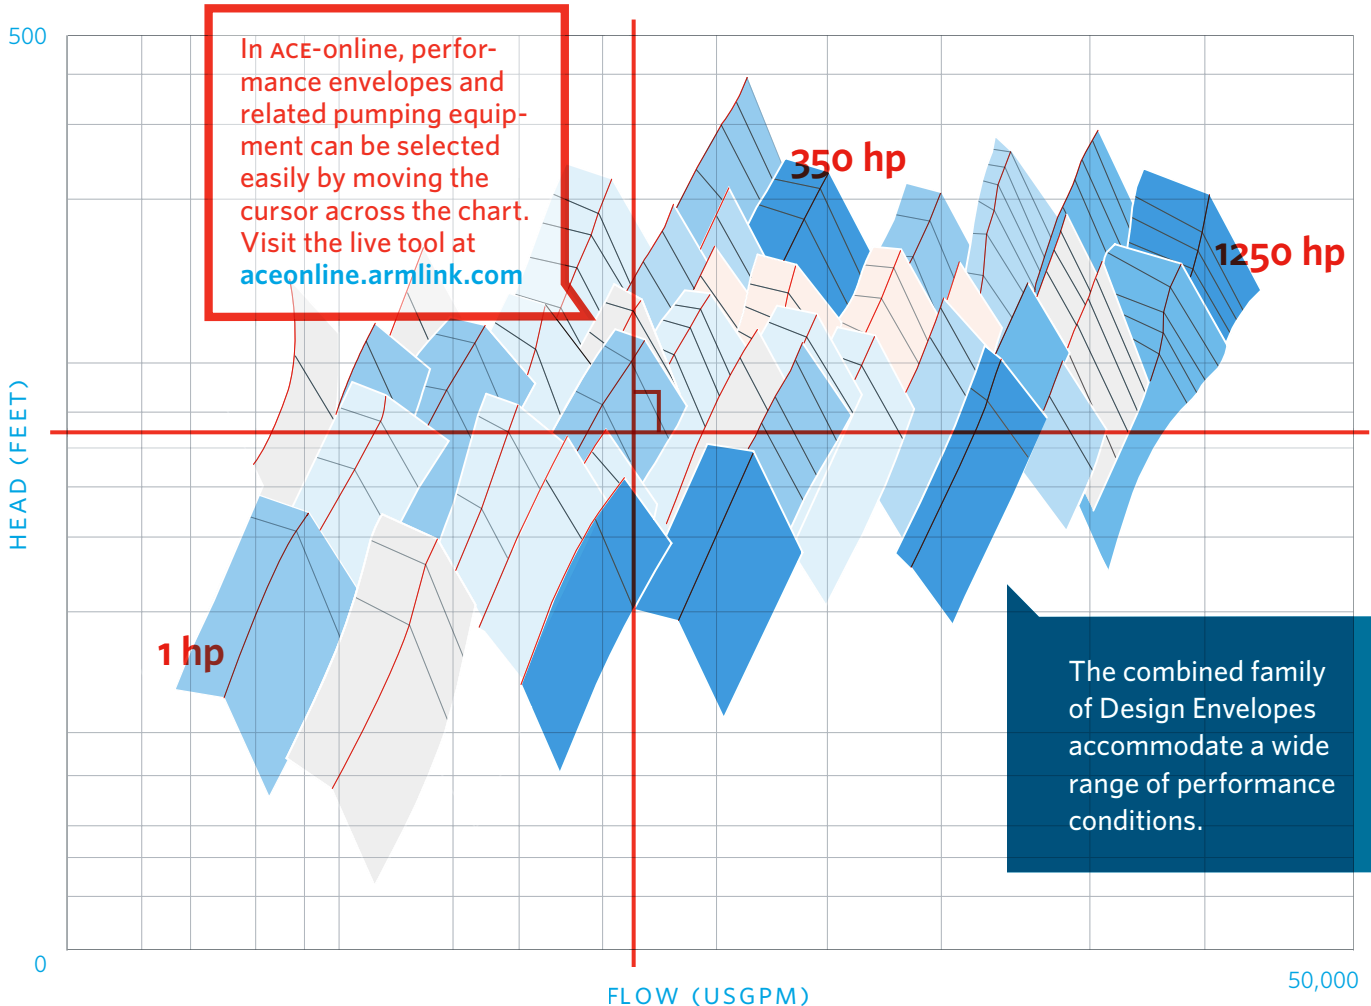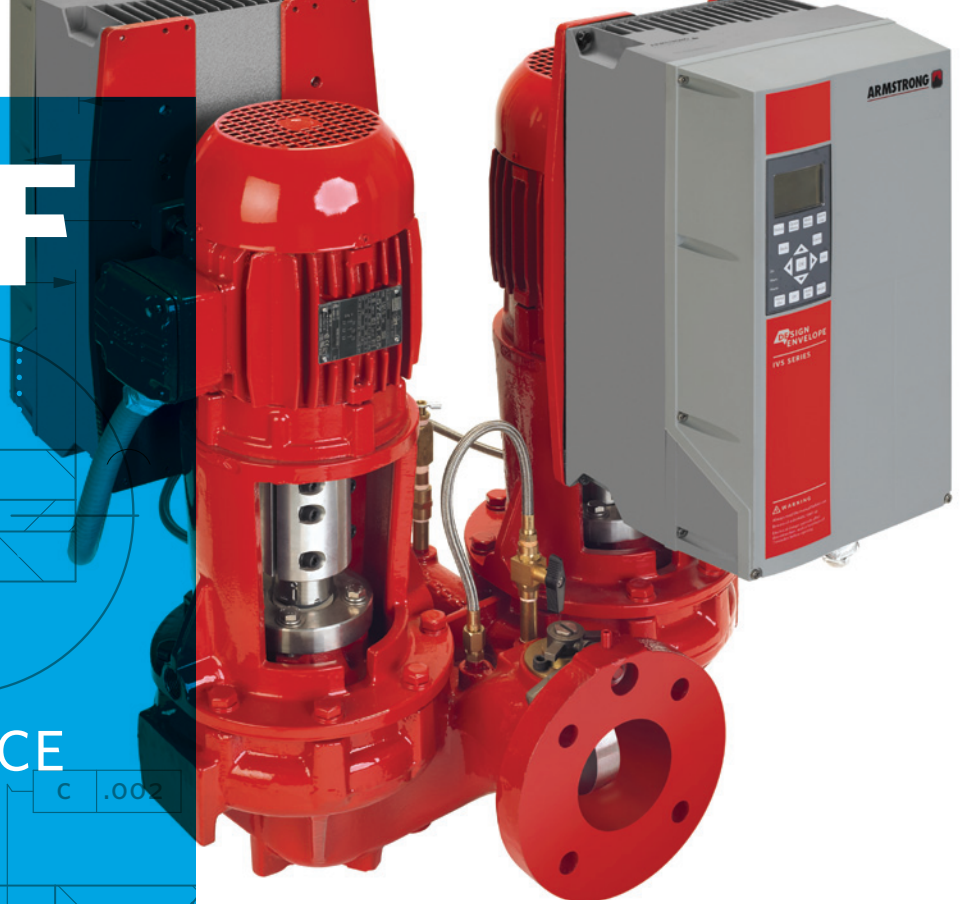

BENEFITS

Reduced energy consumption leads to substantial operating savings

BUILDING OWNERS

- Lowest lifecycle costs
- Reduced energy consumption leads to substantial operating savings
- Green building incentives and rebates available in most regions
- Demand-based variable speed leads to improved occupant comfort
- Selection methodology provides future proofing against changing building loads
- Selection methodology prevents over-sizing of equipment

Broad range of performance leads to reduced iterations of pump selection

DESIGN ENGINEERS


- Broad range of performance leads to reduced iterations of pump selection
- Energy-saving solution reduces HVAC operating costs
- Contributes to LEED certification
- Improved pumping efficiency and control leads to reduced carbon footprint
- Fewer components and reduced wiring means simpler HVAC system drawings
- iVS Sensorless technology means fewer components to select

Faster installation & start up

CONTRACTORS

- Less floor space required
- Fewer peripheral components
- Reduced costs for pipe and pipe installation
- No requirement for concrete pad
- Fewer components to install
- Faster installation and commissioning

DESIGN ENVELOPE IVS PUMP RANGE



4300


INDOORS

Integrated to 350hp

Standalone 400hp - 1250hp

OUTDOORS

Integrated to 125hp




4302

INDOORS

Integrated to 100hp

OUTDOORS

Integrated to 100hp




4380

INDOORS

Integrated to 7.5hp

OUTDOORS

Integrated to 7.5hp



4382

INDOORS

Integrated to 7.5hp


OUTDOORS

Integrated to 7.5hp

OUTDOOR SERIES

Armstrong Design Envelope IVS pumps are available for outdoor applications in Series 4300, 4380, 4302, and 4382 up to a maximum of 125hp (90kW).

- Rated for UL Type 4X with TEFC motor standard.
- Epoxy coated electronics to protect against condensation within the controls.
- Stainless steel backplate prevents corrosion between the backplate and the heat sink.
- Equipped with stainless steel overhead weather shield — this protects the LCP keypad from UV rays, prevents the unit from overheating if exposed to the sun, and prevents accumulation of ice on sensitive areas.

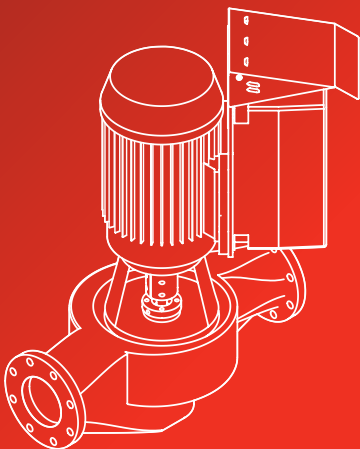

TORONTO

23 BERTRAND AVENUE
TORONTO, ONTARIO
CANADA
M1L 2P3
+416 755 2291

BUFFALO

93 EAST AVENUE
NORTH TONAWANDA, NEW YORK
U.S.A.
14120-6594
+716 693 8813

BIRMINGHAM

HEYWOOD WHARF, MUCKLOW HILL
HALESOWEN, WEST MIDLANDS
UNITED KINGDOM
B62 8DJ
+44 (0) 8444 145 145

MANCHESTER

WENLOCK WAY
MANCHESTER
UNITED KINGDOM
M12 5JL
+44 (0) 8444 145 145

BANGALORE


#59, FIRST FLOOR, 3RD MAIN
MARGOSA ROAD, MALLESWARAM
BANGALORE, INDIA
560 003
+91 (0) 80 4906 3555

SHANGHAI

NO. 1619 HU HANG ROAD, XI DU TOWNSHIP
FENG XIAN DISTRICT, SHANGHAI
P.R.C.
201401
+86 21 3756 6696

ARMSTRONG INTEGRATED
ESTABLISHED 1934

ARMSTRONGINTEGRATED.COM

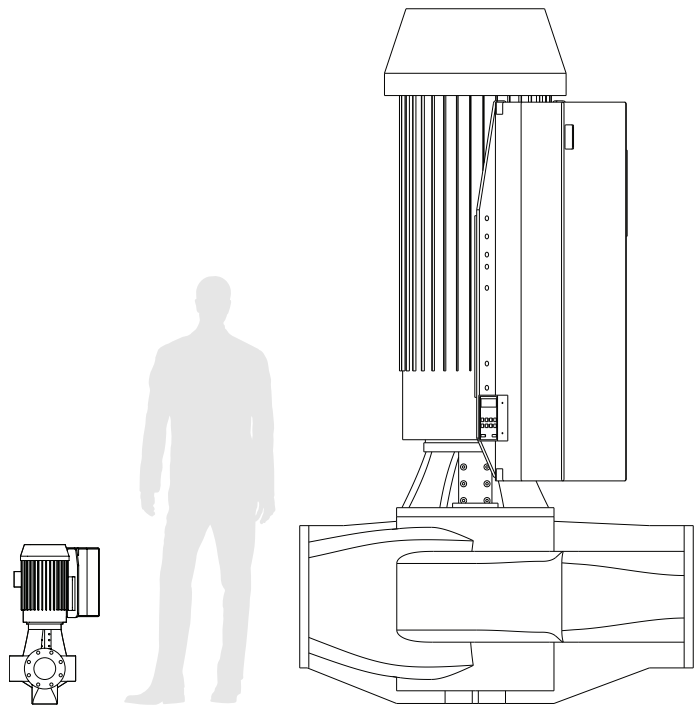

1 hp

350 hp

Contact us at:

+416 755 2291

armstrongintegrated.com/DE

View your savings and ROI
using real data from your
installation. Ask your
Armstrong representative.

